

GOVERNMENT OF JAMMU & KASHMIR
OFFICE OF THE EXECUTIVE ENGINEER CIVIL INVESTIGATION & DESIGN DIVISION
P.D.C SOPORE

-:O:-

Short term abbreviated tender Notice No:- 01/92011 Dated:- 11-07-2011


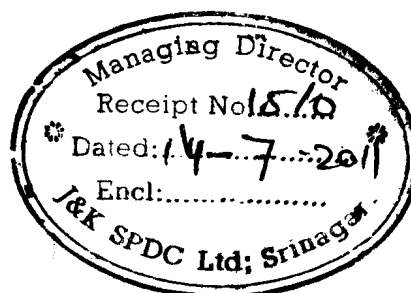
For and on behalf of Managing Director J&K State Power Development Corporation Ltd, Srinagar, sealed short term tenders affixed with Rs:-5/= revenue stamps are invited from the approved P.W.D Contractors for the execution of below mentioned works:-

S.No.	Name of work	Apperox. Estimated Cost Rs. In lacs	E.Money in Rs.	Class of Contract	Time of completion	Cost of Tender document.
01.	Providing of chain link fencing around Guttred PDC Office Complex at Sopore.	1.90 Lacs	3800/=	"D"	20 Days	500/=
02.	Construction of approach road from Main Gate upto the entrance of Divisional Office at PDC Complex Sopore. (Guttred Building)	0.60 Lacs	1200/=	"D"	20 days	200/=

Terms and Conditions

01. The tenders for execution of above mentioned works should be addressed to the Executive Engineer Civil Investigation & Design Division PDC Sopore which should reach to his office through registered post or by hand on or before 21.07.2011 up-to 2.P:M. The tenders shall be opened on the same day or any subsequent day convenient to the undersigned in presence of the contractors who may like to be present. In case the last date of receipt of tenders happens to be a holiday or otherwise, tenders shall be received on next working day, the tender document for the above mentioned works covering the terms & conditions of the contract can be had from the office of the U/sd after production of valid enlistment card/Tin/Pan Nos. as well on any working day during office hours up to 18.07.2011 3P:M on cash payment (non-refundable)
02. The enlistment card should be renewed for the financial year 2011-12.
03. The work shall have to be executed in accordance with the specifications that may be laid down by the Executive Engineer, I/C of the works within the time limit specified for such works failing which the penalty of (Ten Percent) 10% of the total cost of work shall be imposed upon the contractor for one week, and beyond one week penalty of Rs:-1000/= per day will be imposed which shall be at the discretion of the competent authority. Based on the valid grounds, the undersigned reserves to himself the right of granting an extension in the time limit. In case the work is not still completed within the period of the time so extended, Contractors security deposit shall be confiscated in addition to imposition of 10% penalty as per agreement.
04. The contractor shall have to quote rates separately in respect of such items which is outside SSR and for which rate has been asked for. In case the tenderer fails to quote rate for such item, the same item shall be got executed by the contractor

free of cost.

05. Only those contractors can cast their tender who are registered with sales tax department. The tender document shall be issued to the intending contractors only after production of sales Tax Registration Certificate issued by the competent authority.
06. The tenders shall not be accepted without CDR's equivalent to 2% of the advertised cost. The CDR's from registered scheduled Bank should be pledged to Executive Engineer, CI&D Division PDC Sopore. No cheque or cash will be accepted.
07. The contractors shall quote the rates both in words as well as in figures against each item inclusive of all taxes i.e Income Tax Service Sales Tax, Surcharge on service sales tax cess charges etc. The rates quoted by the contractors should be pasted with transparent tap so as to avoid any insertion.
08. Rebated / free of cost tenders shall not be entertained and the same shall be rejected out-rightly by the tender opening authority
09. Tender opening authority reserves the right to accept or reject any tender or to cancel the N.I.T or extend the date without giving reasons thereof.
10. The payment on a/c of work done shall be made as and when the funds are available for the same.
11. All the terms and conditions of this contract shall remain same as laid down in detailed NIT which is in vogue in PDC and PWD Form No.25. The quantities shown in the schedule of Quantities are approximate and are subject to increases or decrease up to (±) 25% for which no extra rate shall be allowed.


 Executive Engineer,
 Civil Investigation & Design Division
 P.D.C Sopore.

No:-EE/CI&D/Spr/ 200-15 Dated:- 11-07-2011

Copy to the:-

- 01/- Managing Director J&K State Power Development Corporation Ltd, Srinagar for favour of information please. /COMPANY SECRETARY JKSPDC Srinagar for info
- 02/- Chief Engineer, Civil Investigation & Design Wing, PDC Bemina Srinagar for information and necessary action please.
- 03/- Director Information Srinagar for information please. He is requested to kindly publish the abstract of the N.I.T (enclosed) in any two leading local dailies, the bill of dailies may please be furnished to the U/Sd for pass & payment.
- 04/- Chief Pay & Accounts Officer P.D.C Unit Baramulla for information.
- 05/- Assistant Executive Engineer, Civil Investigation & Design Sub-Division Sopore for information. This is with reference to his estimate No;-SSD/41 and Dt:-17.06.2011
- 06/- Contractor's Association Sopore/Ba. amulla for information.
- 08/- Notice Board.



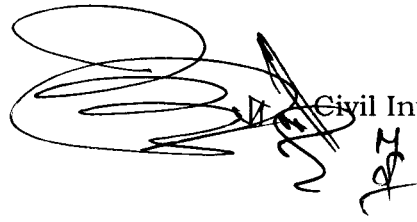
**Advertised quantity schedule /Rate list for, providing of chain link fencing
around gutted P.D.C Complex at sopore**


**Advt. cost=1.90 Lacs excluding cost of
chain link panels supplied by the deptt;**

S. No	Brief specifications	Unit	Adv. Qty.	Adv. Rate as per SSR	Rate to be quoted by contractor
01	Earth work in excavation in foundation trenches incl. dressing of sides and disposal of excavated earth. (All kinds of soil)	Cum	22.28	111.20	
02	Supply and filling stone soling 75mm n.s in foundations incl. hand packing, ramming & all carriages upto site of work.	Cum	4.95	Rate to be quoted by cont.	
03	Centering and shuttering incl. strutting ,propping etc and removal of form work for foundations & mass concrete.	Sqm.	98.10	80.45	
04	Labour for fixing chain link (Prefabricated chain link panels of 8' X7' size duly welded with angle iron posts/ flats) in cement concrete, joining the panels by welding or by fixing bolts and nuts @ 4/No. per joint, drilling of holes in angle iron post for fixing bolts incl. handling of panels within 50Mtr lead but excl. cost of concreting and chain link panels.(Chain link panels supplied by the deptt; at site)	No.	44	Rate to be quoted by cont.	
05	P/L in position cement concrete of specified grade excl. cost of centering and shuttering upto plinth level in 1:3:6 (1cement: 3 sand :6 graded stone agg. (crushed) 20mm n.s)	Cum	37.14	2560.85	

06	Applying priming coat with ready mixed red oxide Zinc chromate primer of approved brand and manufacture on steel work/fencing.	Sqm	228.90	14.45	
07	Painting Two or more coats on steel work with aluminum paint of approved brand and manufacture to give an even shade.	Sqm	228.90	25.10	
08	12mm cement plaster of mix 1:6 on concrete work (1 Cement ; 6 Sand)	Sqm	98.10	74.80	
09	Carriage of Materials by M.T from source to site of work incl. loading unloading:- a/- Crushed stone aggregate 20mm from Tujar to site of work for av. 10 Kms. b/- Sand from seelu for Av.7 Kms. c/- Cement from Local Mkt. for Av. 1 Km.	Cum Cum Tone	33.42 18.18 8.52	92.90 77.48 38.66	


H.S.


H.S.


Executive Engineer,
Civil Investigation & Design Division
P.D.C Sopore.

Advertised quantity schedule /Rate list for, construction of approach road by way of P/L WBM grade Ist, IInd and IIrd to Civil Investigation and Design Division at P.D.C Complex sopore

-:O:-

Advt. cost=0.60 Lacs

S. No	Brief specifications	Unit	Adv. Qty.	Adv. Rate as per SSR	Rate to be quoted by contractor
01	Supply & stacking of graded stone agg. at site of size range excl.carriage a/-90-45 mm size (Quarry) b/-63-45 mm size (Quarry) c/-53-22.4 mm size (crushed)	Cum Cum Cum	25.62 19.21 19.21	366.70 340.90 351.90	
02	Supply & stacking of stone screening/ chippings at site excl. carriage. a/-13.20 mm nominal size Type-A b/-11.20 mm nominal Size Type-B	Cum Cum	3.07 4.61	265.70 287.45	
03	Supply of khak bajree (Binding material) to be spread over soled/ metallated surface incl. all carriages up to site of work	Cum	5.89	Rate to be quoted by the cont.	
04	Laying WBM with specified stone agg. stone screenings and binding material incl. screening , sorting, spreading to template and consolidation with P.R.R complete. a/-Base course with stone agg. 90-45 mm size b/-Base course with stone agg. 63-45 mm size incl. stone Screenings of 13.2 mm size c/-Base course with stone agg. 53-22.4 mm size incl. stone Screenings of 11.20 mm size	Cum Cum Cum	25.62 19.21 19.21	203.70 194.00 194.00	
05	Carriage of Materials by M.T from Tujar to site of work for Av.10 Km incl. loading unloading:- a/- stone agg.90-45 mm Size (Qurry) b/- stone agg.63-45 mm Size (Qurry) c/- stone agg.53-22.4mm Size (Crushed) d/-Stone screening 13.20 & 11.20 mm size	Cum Cum Cum Cum	25.62 19.21 19.21 7.68	109.26 100.95 92.90 92.90	

H.D.

Executive Engineer,